
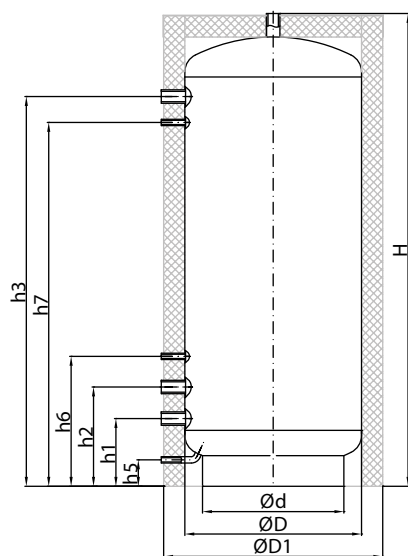


200-
10000 л
Объемы

3 bar
95°C

Рабочее давление
бака



ВТА-4-ЭКОНОМ

Н, h1-h3 Патрубки подающих и обратных магистралей подогревающих контуров
h5 Патрубок технологический
h6-h7 Патрубки датчиков температуры

V _{бака} , л	Габариты, мм				Присоединительные размеры, мм					
	ØH	ØD1	ØD	Ød	h1	h2	h3	h5	h6	h7
200	1310	700	500	400	243	377	960	95	507	850
	1½"				½"					
300	1920	700	500	400	243	377	1610	95	507	1500
	1½"				½"					
400	1700	800	600	450	256	390	1373	100	520	1263
	1½"				½"					
500	1995	800	600	450	256	390	1623	100	520	1513
	1½"				½"					
750	2010	950	750	600	287	421	1654	115	551	1544
	1½"				½"					
1000	2060	1050	850	700	315	449	1682	140	579	1572
	1½"				½"					
1500	2150	1200	1000	850	360	494	1727	165	624	1617
	1½"				½"					
2000	2250	1400	1200	1000	411	545	1778	200	675	1668
	1½"				½"					
3000	2340	1600	1400	1150	457	591	1824	220	721	1714
	2"				½"					
4000	2400	1800	1600	1300	482	616	1849	240	746	1739
	2"				½"					
5000	2900	1800	1600	1300	482	616	2349	240	746	2239
	2"				½"					
6300	2850	2100	1900	Конфигурация и размеры патрубков по запросу заказчика						
8000	3600	2100	1900							
10000	4350	2100	1900							